



Logitech K750 Keyboard Disassembly

Disassemble the keyboard for something deeper inside that outside cleaning

Written By: Miguel Cretu



INTRODUCTION

I teach middle-disassemble the keyboard for something deeper cleaning



TOOLS:


- [Hair dryer \(domestic use\), screwdriver "PHILIPS" precision, something to pry. \(1\)](#)
-

Step 1 — Logitech K750 Keyboard Disassembly




- Remove the battery / battery as it is described in the previous tutorial. Basically levering with a flat screwdriver and carefully

Step 2

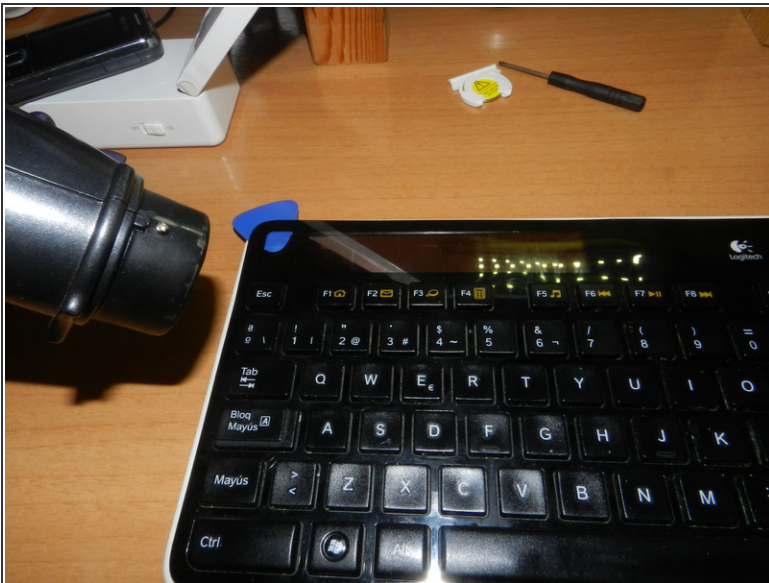


- With a drier, warm things the "plastic" and pull slowly by hand to not break it.
- Note: You can show any mark on the plastic if pulled incorrectly.

Step 3

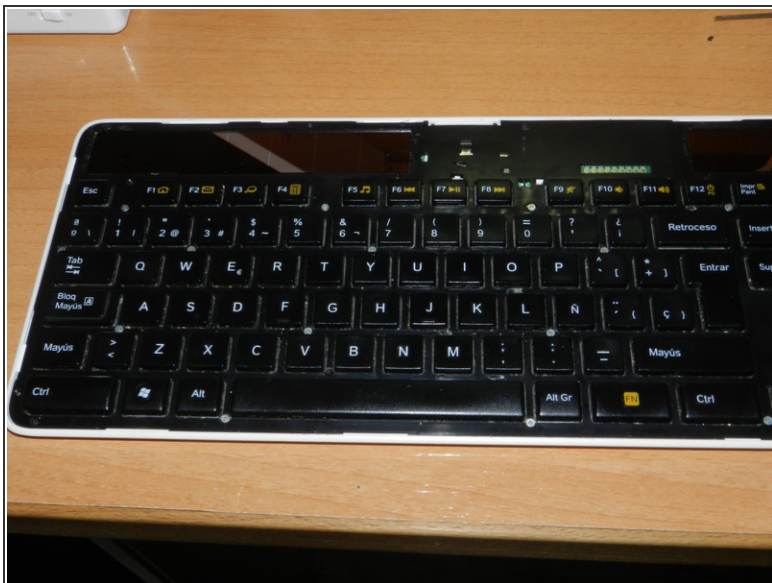

- Once the plastic off, we access the screws.

Step 4

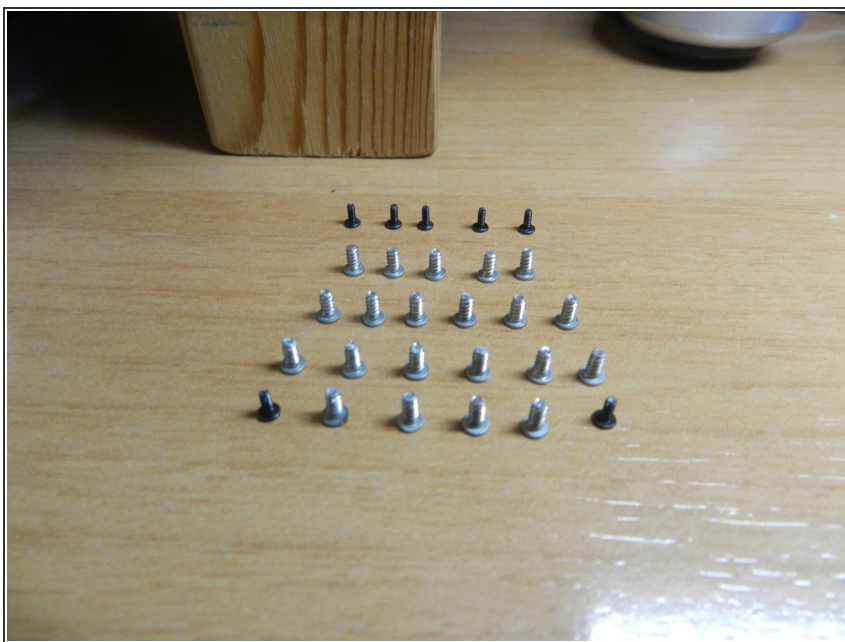


- Unscrew the screws 28 "PHILIPS" self-tapping. I have the mania to place them in the same order as the sack for not mistaken around.

Step 5



- Carefully pry the tabs around the keyboard body. Among the F8 and F9 keys is another tab more. To open, lift slightly from below and pry the screwdriver as screwing or unscrewing.

Step 6

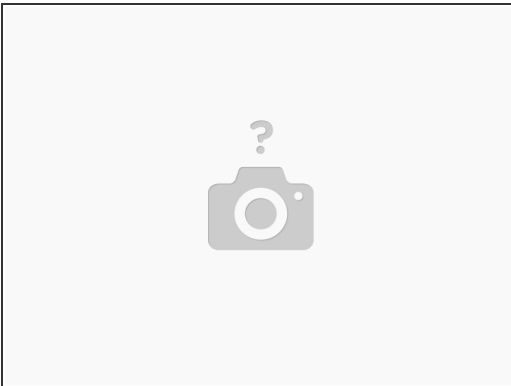

- With the above steps and we would have dismantled the middle keyboard. To reassemble, follow the same steps in reverse. Eye with the plastic, the first time it hit a little off and touched me peel it off and stick again, to center it well.

Para reensamblar tu dispositivo, sigue estas instrucciones en orden inverso.

This document was last generated on 2017-06-27 04:27:16 PM.